




## Prefabricated Strongroom Grade VI

Robur's prefabricated strongroom in Grade VI consists of wall, ceiling and floor panels welded or bolted together enabling installation in location where welding is not possible. The strongroom design is adapted to each project's conditions and needs. The strongroom is constructed with modular panels for a quick and easy assembly, disassembly and extension. The strongroom door must have the same or higher burglary protection grade than the panels.

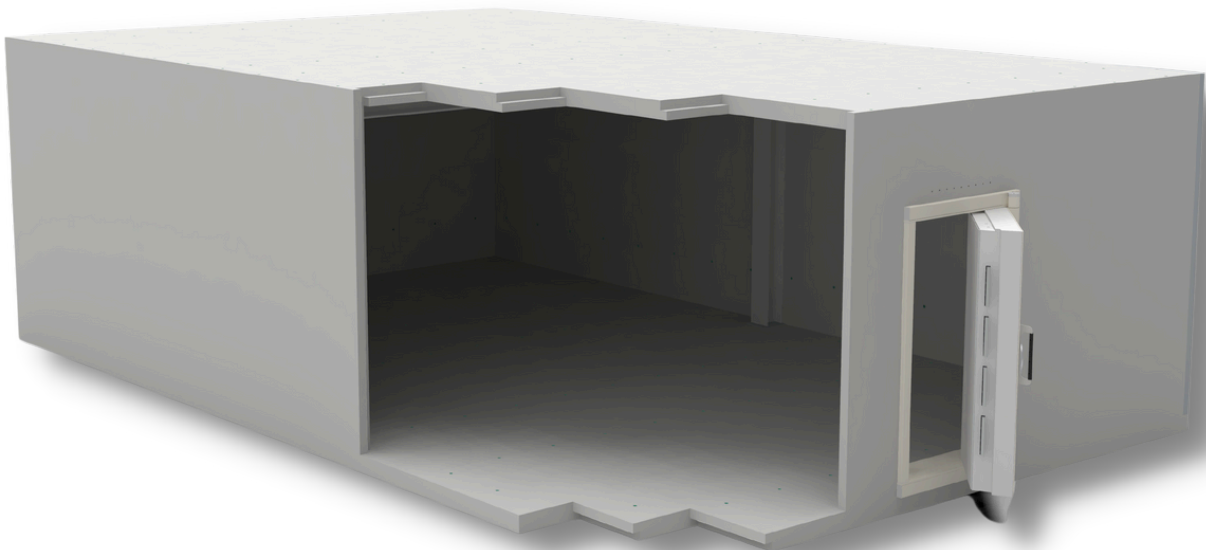

The strongroom door is primed finish. The panels have a raw concrete exterior and a steel-plated, primed interior finish. The exterior may be perceived as sharp.



Robur's prefabricated strongroom can be fitted with reinforcements blocks for ventilation on special request.



As standard, the strongroom is equipped with a row of 8 conduits with  $\varnothing 18$ , placed above the door. Different placement and number of conduits is possible on special request.




Fire protection according to EI90.



Burglary protection certified by SBSC och ECB•S according to the european standard EN 1143-1.

## WEIGHT AND MEASUREMENTS

	RVV Grade VI
<b>Panels - thickness</b> mm	80
<b>Panels - Weight</b> kg/m <sup>2</sup>	250
<b>Max internal span without beams and pillars</b> mm	3500
<b>Minimum internal width</b> mm	1220
<b>Minimum internal height</b> (At clear height of door: 2000 mm)	2080

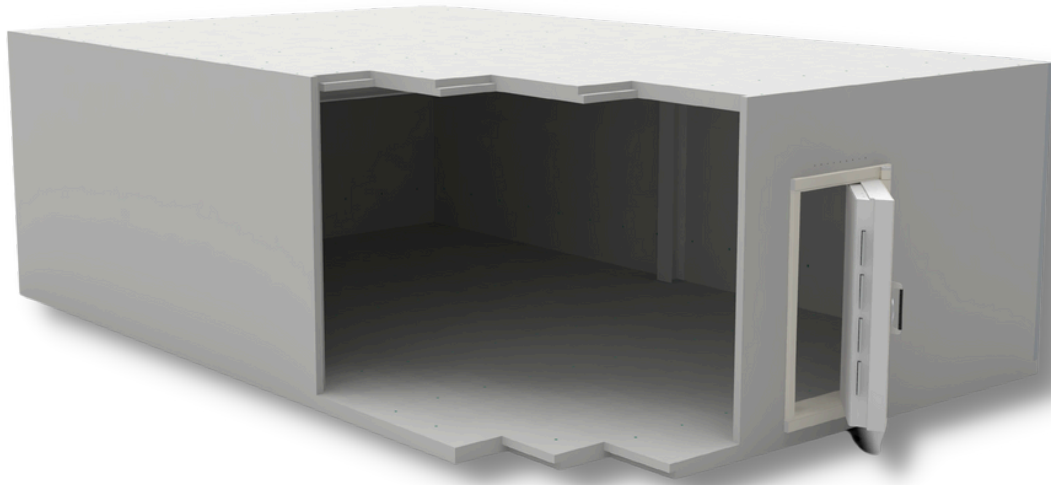

We reserve the right to alter the specification without prior notice.



**Head office:**  
Robur Safe AB  
Lundbyvägen 8  
311 68, Slöinge  
Sweden

+ 46 346 260 260  
info@robursafe.com  
www.robursafe.com